



ATPColor DFP Series

A Complete Direct-to-Fabric Solution

FEATURES

Based on a completely new developed system and on major plotters manufactures, the new family of direct-to-fabric digital printers provides a complete solution that enables printing directly onto polyester fabrics and other fabric substrates with flawless results. The system features precision media handling components and an advanced on-board sublimation unit that together ensure outstanding image quality and rich, saturated colors for flags, banners, textiles, and soft signage that maintain their natural drape and texture.

PRINT ON MESH FABRICS

The ATPColor solution is designed to easily print on open mesh fabrics such as flag material and sports textiles without marking the backside of the fabric with "blow-by" ink. The especially designed ink trough with sponge and pad absorbs any ink that passes through the fabric.

DESIGNED TO BE RUGGED AND RELIABLE

The ATPColor direct-to-fabric printing systems combines trusted performance and reliability with award winning innovative design and print quality.

MEDIA HANDLING SYSTEM

The engineered system features two precision stepping motors and synchronized dancing rollers that automatically fine tune the media feeding process to ensure precise movements with every pass of the print head. Also a special cork covered cylinder can be activated when printing on stretchable media such as Lycra®, spandex and other sports textiles.



FLEXIBILITY

Although the ATPColor system was designed to print directly on fabric, you have the flexibility of printing on dye sub transfer paper for those projects that require it.

OPTIONAL INLINE CUTTING SYSTEM

Specifically designed for the ATPColor Direct-to-Fabric systems, the InLine Cutting System dramatically increases the ATPColor capabilities. The production process is made easier and faster by cutting printed fabric on the vertical axis. The system uses cold knife technology to make sharp flawless cuts. The InLine Cutting System can be stopped or paused without creating defects in the printed fabric a significant advantage over traditional hot knife systems. The ATPColor Direct-to-Fabric printers provide a very productive work flow with sublimation printing directly onto the fabric then fixing or sublimating the image. Now with the addition of the InLine Cutting System, you can also cut the fabric, while keeping it contained within the footprint of a single compact roll-to-roll printer system.

Features:

- Rotating Stainless Steel Cutter Bar driven by precision 24VDC motor
- Heavy Duty construction for industrial use Cold Knife Technology
- Adjustable Knives, 4 included with the 74" version, 6 included with the 104" version
- Compact Foot Print, Mounts to OBS Unit, resulting in no increase in printer footprint Includes all accessories necessary for installation.




Made in Italy
Quality
Technology
Creativity

ATPColor DFP Series

ATPColor DFP Series, A Complete Direct-to-Fabric Solution

- Produce flag, banners, textiles and soft signage with a single system;
- Print directly onto coated or uncoated polyester fabrics;
- No need for transfer paper or separate heat press;
- High Capacity Bulk Ink System – ideal for unattended printing and lower production costs;
- On Board Sublimation System bonds the printed image to the fabric resulting in a permanent, durable image;
- Intelligent Workflow – Roll-to-roll operation minimizes requirement for operator oversight;
- Unattended automatic turn-off, the system can finish, completely unattended a printing and color fixation job, it will finish curing the textile and it will turn off the calender, everything automatic.

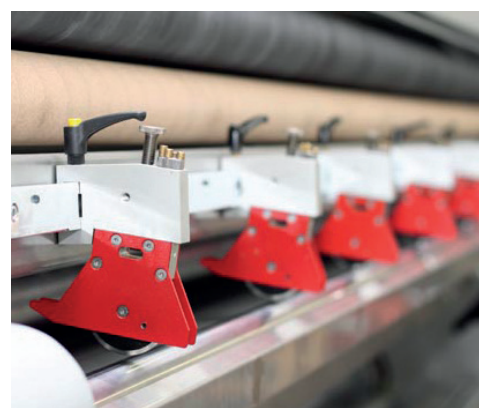

Printers Technical Specifications

	DFP-740 G4	DFP-1000 G4	DFP-1320 G4	DFP-1320 G4-12
Printing Width	188 cm	260 cm	330 cm	330 cm
Printing Heads	8	8	8	12
Color	CMYK x 4	CMYK x 4	CMYK x 4	CMYK x 4
Resolution	max 1200 dpi	max 1200 dpi	max 1200 dpi	max 1200 dpi
RIP Software	Included	Included	Included	Included
Max Speed	70 sqm/h 3 pass mode 600 dpi	73 sqm/h 3 pass mode 600 dpi	75 sqm/h 3 pass mode 600 dpi	106 sqm/h 3 pass mode 600 dpi
Ink Bulk System	4 x 2,5 lt	4 x 2,5 lt	4 x 2,5 lt	4 x 2,5 lt
Calender Type	Specially Developed for maximum heating omogeneity	Specially Developed for maximum heating omogeneity	Specially Developed for maximum heating omogeneity	Specially Developed for maximum heating omogeneity
Max fixation temperature	200 °C	200 °C	200 °C	200 °C
Max fabric roll weight	120 kg	120 kg	120 kg	120 kg
Max fabric roll diameter	350 mm	350 mm	350 mm	350 mm
Dimension	-	-	530x120x160h cm	530x120x160h cm
Power Consumption	7 KW	8 KW	8 KW	12 KW
Power Supply	400V/32 Amps 3phase	400V/32 Amps 3phase	400V/32 Amps 3phase	400V/32 Amps 3phase
Optional Accessories	Inline Cutting System Jumbo Roll Unwinding/ Rewinding	Inline Cutting System Jumbo Roll Unwinding/ Rewinding	Inline Cutting System Jumbo Roll Unwinding/ Rewinding	Inline Cutting System Jumbo Roll Unwinding/ Rewinding
Enviromental Requirements	20-25°C - Humidity 45-80%	20-25°C - Humidity 45-80%	20-25°C - Humidity 45-80%	20-25°C - Humidity 45-80%

All specifications subject to change without previous notice